


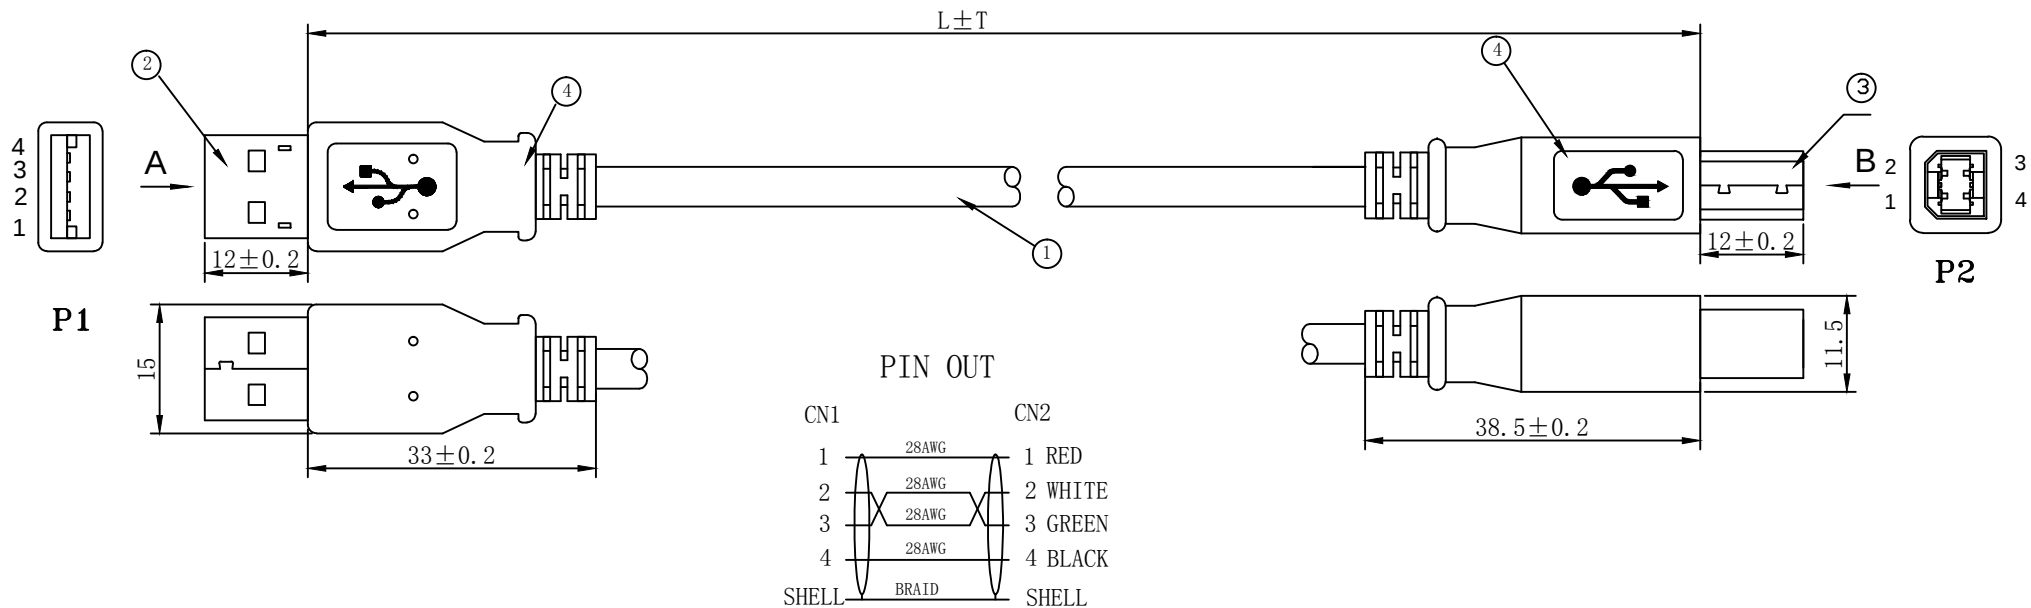

ITEM NO.	LENGTH
11. 99. 8809B	800±20mm
11. 99. 8819B	1800±30mm
11. 99. 8831B	3000±50mm
11. 99. 8844B	4500±100mm

NOTE:

1. Electrical test:

- (1). 100% open short & miss wire test;
- (2). Insulation resistance: DC 300V 10M Ω ;
- (3). Contactor resistance: 3 Ω Max;
- (4). Dielectric strength: 100V AC/Minute, 1mA.

2. RoHS 2.0 & REACH compliant

3. PRINTING: USB 2.0 CABLE, 28AWG×1P+28AWG×2C

MATERIAL LIST:

④	OUTER MOLD	Shore 88A PVC Color: White	2	
③	USB B TYPE	USB B /M Type, The Pin Gold Plating 3U", the shell for Nickel Plating	1	
②	USB A TYPE	USB A /M Type, The Pin Gold Plating 3U", the shell for Nickel Plating	1	
①	CABLE	USB 2.0 28AWG (BC*1P)+28AWG (BC*2C)+AB AL-MG JACKET: PVC/white OD: 3.8±0.2mm	1	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT'Y	REMARK

		NEW	2018-12-05	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

DESC.	VALUE USB 2.0 Cable Type AM-BM, white
-------	---------------------------------------

SECOMP