GPU SuperServer ARS-221GL-NR

DP NVIDIA Grace Superchip system with up to 2 L40S or 2 single non-bridged NVIDIA H100 NVL

More details here

Key Applications

High Performance Computing, AI/Deep Learning Training, Large Language Model (LLM) Natural Language Processing, General purpose CPU workloads, including analytics, data science, simulation, HPC, application servers, and more,




Key Features

- High density 2U GPU system with up to 2 NVIDIA® PCIe GPUs PCIe-based NVIDIA H100 NVL and NVIDIA L40s;
- Energy-Efficient NVIDIA Grace™ CPU Superchip with 144 Cores;
- 480GB or 240GB LPDDR5X onboard memory option for minimum latency and maximum power efficiency;
- 7 PCIe 5.0 x16 FHFL Slots;
- NVIDIA BlueField-3 Data Processing Unit Support for the most demanding accelerated computing workloads.;
- E1.S NVMe Storage Support;

Form Factor	2U Rackmount Enclosure: 438.4 x 88 x 900mm (17.25" x 3.46" x 35.43") Package: (22.5" x 11" x 45.5")
Processor	Dual processor(s) NVIDIA Dual 72-core CPUs on a Grace™ CPU Superchip
GPU	Max GPU Count: Up to 2 double-width GPU(s) Supported GPU: NVIDIA PCIe: H100 NVL, L40S CPU-GPU Interconnect: PCIe 5.0 x16 CPU-to-GPU Interconnect GPU-GPU Interconnect: PCIe
System Memory	Slot Count: Onboard Memory Max Memory: Up to 480GB ECC LPDDR5X
Drive Bays Configuration	Default: Total 4 bay(s) • 4 front hot-swap E1.S NVMe drive bay(s)
Expansion Slots	Default • 7 PCIe 5.0 x16 FHFL slot(s)
On-Board Devices	Chipset: NVIDIA C2 Network Connectivity: 1 RJ45 1GbE IPMI: Support for Intelligent Platform Management Interface v.2.0 IPMI 2.0 with virtual media over LAN and KVM-over-LAN support
Input / Output	1 mini-DP port(s)


©2024 Copyright Super Micro Computer, Inc. All rights reserved. *Product specifications may change without notice

(Front View – System)

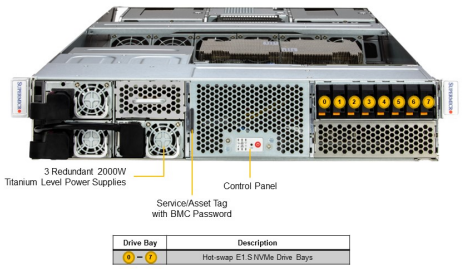

Drive Bay	Description
0 – 7	Hot-swap E1.S NVMe Drive Bays

(Rear View – System)

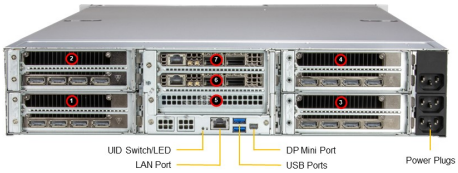

	Slot Description
1 – 4	PCIe 5.0 x16 FHFL / Double-Width GPU
5 – 7	PCIe 5.0 x16 FHFL Slots / Single-Width GPU

System Cooling	Fans: 6 heavy duty fans with optimal fan speed control
Power Supply	3x 2000W Redundant Titanium Level (96%) power supplies
System BIOS	BIOS Type: AMI 32MB SPI Flash EEPROM
Management	Redfish API; Supermicro Server Manager (SSM); Supermicro Power Manager (SPM); Supermicro Update Manager (SUM); Supermicro SuperDoctor® 5 (SD5); KVM with dedicated LAN ; IPMI 2.0; Watch Dog; NMI; Intel® Node Manager; OOB Management Package (SFT-OOB-LIC)
PC Health Monitoring	CPU: Monitors for CPU Cores, Chipset Voltages, Memory FAN: Fans with tachometer monitoring Status monitor for speed control Pulse Width Modulated (PWM) fan connectors Temperature: Monitoring for CPU and chassis environment Thermal Control for fan connectors
Dimensions and Weight	Weight: Gross Weight: 86.5 lbs (39.2 kg) Net Weight: 67.5 lbs (30.6 kg) Available Color: Black front & silver body
Operating Environment	Operating Temperature: 10°C ~ 35°C (50°F ~ 95°F) Non-operating Temperature: -40°C to 60°C (-40°F to 140°F) Operating Relative Humidity: 8% to 90% (non-condensing) Non-operating Relative Humidity: 5% to 95% (non-condensing)
Motherboard	**Super G1SMH**
Chassis	**CSE-GP201TS-R000NP**

©2024 Copyright Super Micro Computer, Inc. All rights reserved. *Product specifications may change without notice