


# Cable de FTP Cat5e , gris , a 20 m

PP22-20M

- Latiguillo FTP con moldeadas 50u de alivio de tensiones " enchufes 8P8C , a 20 metros

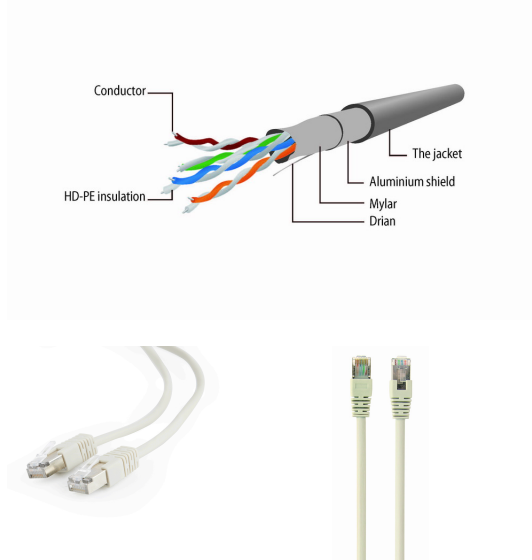

## Características

- Papel de aluminio blindado de par trenzado cable de conexión

## Especificaciones

Patch cord Enhanced category 5 FTP (shielded)  
Length: according to the item  
Structure: AWG 26 (7 x 0.15 mm wire), CCA  
HDPE insulation of the wire: 0.85 mm  
With LDPE filler: not used  
With polyester tape  
With aluminum foil  
Drain hose: 7 x 0.12 mm CCA  
PVC outer insulation: 5.0 mm  
Color: according to the item  
Operation up to 100 MHz

## Embalaje

Cantidad por caja, pcs	20
Volumen caja, M3	0.04
Peso caja, kgs	9.06
Medidas cajas individuales LxWxH:	320x250x50 mm
Medidas caja LxWxH	400x400x250 mm
Pais de origen	CN
Código de barras	8716309045322
codigo de aduanas	8544421000

## Certificados

