
NEXT PDU & MAINTENANCE BYPASS SWITCH




Rack Type - HW for 6-10kVA UPS

- 16A for 208/220/230/240 VAC, 20A for 110/115/120/127 VAC
- Provides continuous power to connected equipment during UPS maintenance
- Easy operation with simple rotary switch and indicators
- Master-slave function for energy saving
- Provides a large number of sockets for extended usage
- Provides rack and tower designs to fit into a diverse working environment
- Simple installation with plug-and-play socket type
- Suitable for all UPSs up to 3KVA





System Configuration:

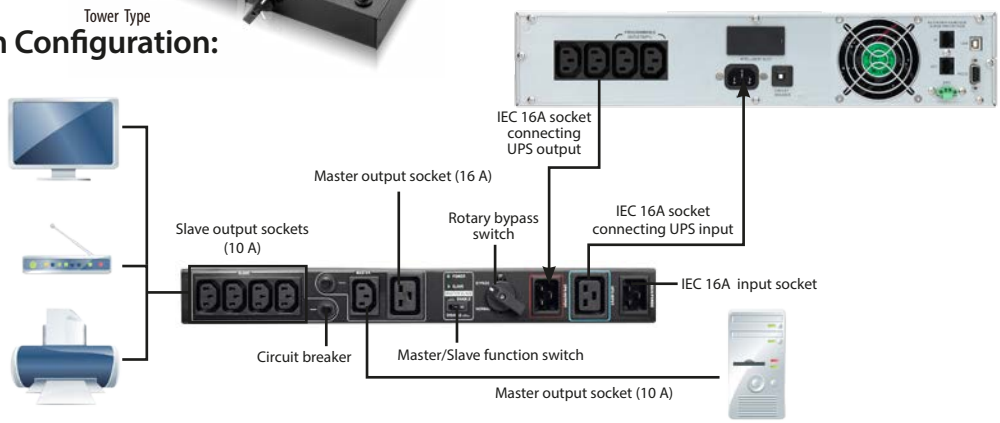

PDU & Maintenance Bypass Switch Selection Guide

MODEL		HotSwap MBS-Rack	HotSwap MBS-Wall Mount/Tower
Current Rating		16 A max. for 208/220/230/240 VAC / 20 A max. for 110/115/120/127 VAC	
Voltgae Rating		208/220/230/240 VAC or 110/115/120/127 VAC	
Master/Slave Function		Yes. When power consumption in Master outlet is lower than 20W (± 5W), it will shut off the power for slave outlets.	N/A
CONNECTION			
Input	AC Power	1 x IEC (16 A) connector and 1 x customized plug cable	
	UPS Input	1 x IEC (16 A) connector and 1 x cable (16A - 10A IEC cable for 1K/2K, 16A - 16A IEC cable for 3K)	
	UPS Output	1 x IEC (16 A) connector and 1 x cable (16A - 10A IEC cable for 1K/2K, 16A - 16A IEC cable for 3K)	
Output	IEC	5 x IEC 10A sockets + 1 x IEC 16A socket (with 2 circuit breakers)	8 x IEC 10A sockets + 1 x IEC 16A socket (with 2 circuit breakers)
	Schuko (NL/LU)	4 x Schuko 16A scokets	4 x Schuko 16A sockets
	USE (BE/FR)	4 x USE 16A scokets	4 x USE 16A scokets
	HW	HW P+N	HW P+N
PHYSICAL			
Dimension, D x W x H(mm)	IEC	80 x 438 x 50	180 x 160 x 50
	Schuko	80 x 438 x 60	180 x 200 x 50
	UK		
	NEMA	80 x 438 x 50	180 x 160 x 50
Net Weight (kgs)		1.5	1.3
ENVIRONMENT			
Operating Temperature		20-90 % RH @ 0- 45°C (non-condensing)	
NEXT PARTNUMBERS			
HotSwap Bypass IEC		88002	88006
HotSwap Bypass BE/FR		88004	88008
HotSwap Bypass NL/LU		88003	88007
HotSwap Bypass HW (6/10 kVA)		88005	N/A

Product specifications are subject to change without further notice