


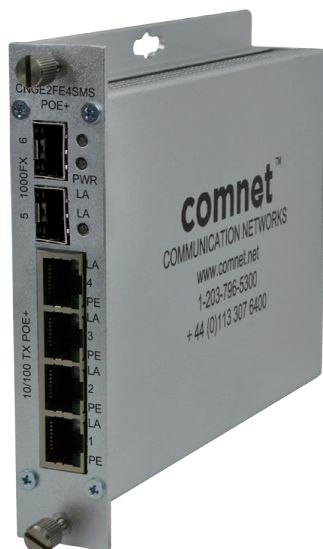

The Comnet CNGE2FE4SMS[POEHO] is a six-port self-managed switch with uplink management functionality and provides 4 copper ports operating at 10/100 Mbps and two Gbps optical SFP* ports. It is designed to combine four electrical ports and one Gbps SFP port into one of two optical SFP ports. The CNGE2FE4SMS[POEHO] SFP ports forwards this data to the next network device or can be configured for drop and insert operation. The CNGE2FE4SMS[POEHO] uses Comnet SFPs for connector and distance options. There is no programming required to use this product. The Comnet CNGE2FE4SMS[POEHO] comes pre-programmed, preventing network video flooding with dip switch selection of fiber ports as uplink or as an unmanaged switch. Ports 1 & 2 can supply up to thirty (30) watts of PoE and up to sixty (60) watts of PoE from ports 3 & 4.

SPECIFICATIONS

Data	
DATA INTERFACE	ETHERNET
DATA RATE	10/100/1000 MBPS IEEE 802.3 COMPLIANT FULL DUPLEX OR HALF DUPLEX ELECTRICAL PORTS/FULL DUPLEX OPTICAL PORT
ELECTRICAL	CNGE2FE4SMSPOEHO PORTS 1 AND 2: 30 W MAX CNGE2FE4SMSPOEHO PORTS 3 AND 4: 60 W MAX SFP DEPENDENT

KEY FEATURES

- No Programming Required
- 10/100/1000 Mbps Ethernet
 - 10/100 BASE-T/TX electrical ports
 - 1000 BASE-FX SFP ports for Gigabit operation
- Electrical ports support Auto-Negotiation for 10 Mbps or 100 Mbps, full duplex or half duplex data.
- Optical port supports 1000 Mbps full duplex data
- IEEE802.3at Power over Ethernet (PoE)†
- Up to 30 W PoE+ on Ports 1 and 2†
Up to 60 W PoE+ on Ports 3 and 4†
- Automatic MDI/MDI-X crossover
- Designed to meet full compliance with the environmental requirements (ambient operating temperature, mechanical shock, vibration, humidity with condensation, highline/ low-line voltage conditions and transient voltage protection) of NEMA TS-1/TS-2 and the Caltrans Specification for Traffic Signal Control Equipment.
- Voltage transient protection on all power and signal input/ output lines provides protection from power surges and other voltage transient events.
- No in-field optical adjustments required
- Power, Activity and Port PoE status LED indicators confirm operating status of this device
- Hot-swappable rack modules
- IEEE 802.3 compliant
- TAA & NDAA Compliant
- Made in the USA
- Limited Lifetime Warranty

APPLICATIONS

- 10/100/1000 Mbps Ethernet
- High Speed Computer Links
- IP Video

* SFP = Small Form-Factor Pluggable Module
† CNGE2FE4SMSPOEHO models only

Fibers ¹ Connectors	
OPTICAL	REQUIRES SELECTION OF SOLD-SEPARATELY SFP MODULES. SEE COMNET DATA SHEET FOR NUMBER AND DESCRIPTION OF SFP MODULES. TERMINAL BLOCK
POWER	RJ45
DATA	RJ45 PORT SUPPORTS IEEE802.3AT
POE Pin Assignment	
	END-POINT POSITIVE (VCC+): RJ45 PIN 1, 2 (RJ45 PIN 1,2 AND 4,5 ON 60W PORTS) NEGATIVE (VCC-): RJ45 PIN 3, 6 (RJ45 PIN 3,6 AND 7,8 ON 60W PORTS)
LED Indicators	
	- OPTICAL LINK/DATA ACTIVITY - ELECTRICAL LINK/DATA ACTIVITY - POWER - POE
Power	
OPERATING VOLTAGE	48 TO 57 VDC POE, 12 TO 24 VDC NON-POE
CURRENT DRAW	5A MAX, WITH POE, 1A W/OUT POE
Electrical & Mechanical	
SURFACE MOUNT	WALL OR FLAT SURFACE SCREW ATTACHMENT
CURRENT PROTECTION	AUTOMATIC RESETTABLE SOLID-STATE CURRENT LIMITERS
CIRCUIT BOARD	MEETS IPC STANDARD
SIZE	6.1 × 5.3 × 1.1 IN (15.5 × 13.5 × 2.8 CM)
SHIPPING WEIGHT	<2 LBS./0.9 KG
Environmental	
MTBF	>100,000 HOURS
OPERATING TEMP	-40° C to +75° C
STORAGE TEMP	-40° C to +85° C
RELATIVE HUMIDITY	0% TO 95% (NON-CONDENSING) ¹

AGENCY COMPLIANCE



PART 15 COMPLIANT



E322911



N24621



MADE IN THE
USA

ORDERING INFORMATION

Part Number	Description
CNGE2FE4SMS	6 PORT GIGABIT AND 10/100 MBPS ETHERNET SELF-MANAGED SWITCH 2 SFP FX, 4TX
CNGE2FE4SMSPOEHO	6 PORT GIGABIT AND 10/100 MBPS ETHERNET SELF-MANAGED SWITCH, 2 SFP FX, 2TX WITH 60W OF POE+ POWER, 2TX WITH 30W OF POE+ POWER
OPTIONS	[1] ADD SUFFIX 'C' FOR CONFORMALLY COATED CIRCUIT BOARDS TO EXTEND TO CONDENSATION CONDITIONS (EXTRA CHARGE, CONSULT FACTORY) DIN-RAIL MOUNTING ADAPTOR PLATE KIT – WITH MOUNTING HARDWARE (OPTIONAL, ORDER MODEL DINBKT1 OR DINBKT4) POWER SUPPLY SOLD SEPARATELY

NOTE: This product requires a fiber installation with a minimum 30 dB connector return loss. The use of Super Polish Connectors is recommended. Complies with FDA Performance Standard for Laser Products, Title 21, Code of Federal Regulations, Subchapter J. In a continuing effort to improve and advance technology, product specifications are subject to change without notice.

TYPICAL APPLICATION

