

LE-Series

LED-backlit Display 27" | 24" | 22"

Ergonomic Displays for Home and Diverse Business Environments



The LE-Series is crafted with comfort and efficiency in mind. Its ergonomically-designed stand allows multiple viewing options, while its low blue light filter and flicker-free backlight ensure a comfortable viewing experience. Multiple connectivity options—DisplayPort, HDMI, and VGA—enable a wealth of multimedia applications and flexibility of connections. Various preset picture modes and colour settings are provided for different screen applications both at the workplace and in the home.







Maximized Comfort and Efficiency

An ergonomically-designed stand makes it possible to configure your workstation and create a working environment the way you want it. For comfort, convenience, and efficiency, tilt, pivot, or swivel the display, adjust its height, or shift to either portrait or landscape mode.

Eye Comfort

Eye comfort figures high on the list of strengths that define the LE-Series. The flicker-free backlight and blue light filter of the LE-Series ensure a comfortable viewing experience by reducing eyestrain after long periods of use.

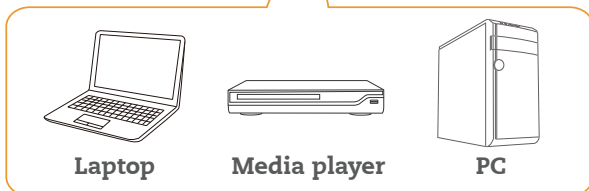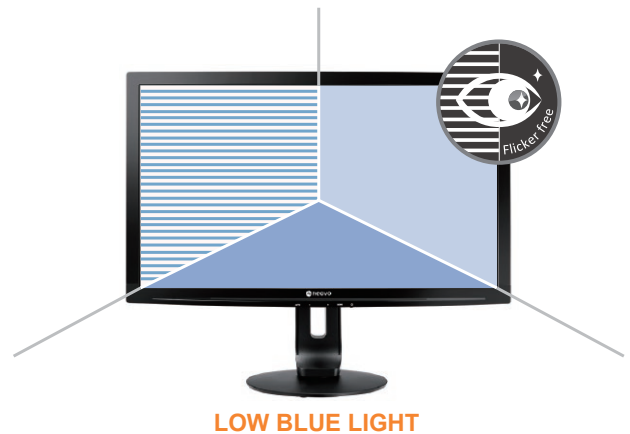

Flexible Connectivity and Multimedia Options

Connectivity versatility brings immense flexibility. Given its HDMI, DisplayPort, and VGA input options, you can easily connect an LE-Series display to your current or older peripherals, like PCs, laptops, or media players and enjoy Full HD resolution video and audio content.

Features

- LED-backlit technology with 1920 x 1080 resolution
- Ergonomically-designed stand: tilt, pivot, swivel, height adjustable for multiple viewing options
- Flicker-free backlight and blue light filter for eye comfort
- DisplayPort 1.2 and HDMI inputs for Full HD connectivity with multimedia devices
- VESA mounting for flexible installation



Specifications

LE-27E

LE-24E

LE-22E

Specifications		LE-27E	LE-24E	LE-22E
Panel	Panel Type	LED-Backlit TFT LCD	LED-Backlit TFT LCD	LED-Backlit TFT LCD
	Panel Size	27.0"	23.6"	21.5"
Panel	Max. Resolution	FHD 1920 x 1080	FHD 1920 x 1080	FHD 1920 x 1080
	Pixel Pitch	0.311 mm	0.272 mm	0.248 mm
	Brightness	300 cd/m ²	250 cd/m ²	250 cd/m ²
	Contrast Ratio	20,000,000:1 (DCR)	20,000,000:1 (DCR)	20,000,000:1 (DCR)
	Viewing Angle (H/V)	170°/160°	170°/160°	170°/160°
	Display Colour	16.7 M	16.7 M	16.7 M
	Response Time	3 ms	3 ms	3 ms
	Frequency (H/V)	H Freq. V Freq.	30 kHz – 83 kHz 56 Hz – 76 Hz	30 kHz – 83 kHz 56 Hz – 76 Hz
Input	VGA	15-Pin D-Sub	15-Pin D-Sub	15-Pin D-Sub
	HDMI	HDMI 1.4	HDMI 1.4	HDMI 1.4
	DisplayPort	DisplayPort 1.2	DisplayPort 1.2	DisplayPort 1.2
Audio	Audio In	Stereo audio jack for PC (3.5 mm) x 1	Stereo audio jack for PC (3.5 mm) x 1	Stereo audio jack for PC (3.5 mm) x 1
	Audio Out	Stereo audio jack (3.5 mm) x 1	Stereo audio jack (3.5 mm) x 1	Stereo audio jack (3.5 mm) x 1
	Speaker	2 W x 2	2 W x 2	2 W x 2
Power	Power Supply	Internal	Internal	Internal
	Power Requirement	100-240 V, 50-60Hz	100-240 V, 50-60 Hz	100-240 V, 50-60 Hz
	Consumption	40 W (On) < 0.5 W (Off)	40 W (On) < 0.5 W (Off)	33 W (On) < 0.5 W (Off)
Operating Conditions	Temperature	0°C ~ 40°C (32°F ~ 104°F)	0°C ~ 40°C (32°F ~ 104°F)	0°C ~ 40°C (32°F ~ 104°F)
	Humidity	10% ~ 85% (No condensation)	10% ~ 85% (No condensation)	10% ~ 85% (No condensation)
Storage Conditions	Temperature	-20°C ~ 60°C (-4°F ~ 140°F)	-20°C ~ 60°C (-4°F ~ 140°F)	-20°C ~ 60°C (-4°F ~ 140°F)
	Humidity	10% ~ 85% (No condensation)	10% ~ 85% (No condensation)	10% ~ 85% (No condensation)
Mounting	VESA FPM/PMI	Yes (100 x 100 mm)	Yes (100 x 100 mm)	Yes (100 x 100 mm)
Ergonomics	Tilt	-3.5°~21.5°	-3.5°~21.5°	-3.5°~21.5°
	Pivot	0°~ 90°	0°~ 90°	0°~ 90°
	Swivel	±130°	±130°	±130°
	Height Adjustment	0-110 mm	0-110 mm	0-110 mm
Security	Kensington Security Socket	Yes	Yes	Yes
Dimensions	Product (W x H x D)	642.0 x 533.7 x 249.0 mm (25.3" x 21.0" x 9.8")	566.0 x 510.2 x 249.0 mm (22.3" x 20.1" x 9.8")	505.6 x 494.7 x 249.0 mm (19.9" x 19.5" x 9.8")
	Packaging (W x H x D)	753.0 x 473.0 x 307.0 mm (29.6" x 18.6" x 12.1")	650.0 x 430.0 x 292.0 mm (25.6" x 16.9" x 11.5")	585.0 x 400.0 x 272.0 mm (23.0" x 15.7" x 10.7")
Weight	Product Weight	7.5 kg (16.5 lb)	5.8 kg (12.8 lb)	5.4 kg (11.9 lb)
	Packaged Weight	10.1 kg (22.2 lb)	8.3 kg (18.3 lb)	7.5 kg (16.5 lb)
Regulation Approval	Certification & Compliance	CB, CE, FCC, BSMI, RoHS, WEEE, REACH	CB, CE, FCC, BSMI, RoHS, WEEE, REACH	CB, CE, FCC, BSMI, RoHS, WEEE, REACH
Accessories	Supplied	Power Cord, 15-Pin D-Sub Cable, Audio Cable, Quick Start Guide, Warranty Card	Power Cord, 15-Pin D-Sub Cable, Audio Cable, Quick Start Guide, Warranty Card	Power Cord, 15-Pin D-Sub Cable, Audio Cable, Quick Start Guide, Warranty Card
Optional Accessories		Wall Mount: Wall Mounting Arm: WMA-01 Wall Mounting Kit: WMK-01, WMK-03 Ceiling Mount: CMP-01 Desk Mount: Desk Mounting Kit: DMC-01, DMC-02D Desk Mounting Stand: DMS-01D, DMS-01Q Height Adjustable Stand: ES-02	Wall Mount: Wall Mounting Arm: WMA-01 Wall Mounting Kit: WMK-01, WMK-03 Ceiling Mount: CMP-01 Desk Mount: Desk Mounting Kit: DMC-01, DMC-02D Desk Mounting Stand: DMS-01D, DMS-01Q Height Adjustable Stand: ES-02	Wall Mount: Wall Mounting Arm: WMA-01 Wall Mounting Kit: WMK-01, WMK-03 Ceiling Mount: CMP-01 Desk Mount: Desk Mounting Kit: DMC-01, DMC-02D Desk Mounting Stand: DMS-01D, DMS-01Q Height Adjustable Stand: ES-02

Global Headquarters

Taipei, Taiwan

EMEA Regional Headquarters

Capelle a/d IJssel, The Netherlands

North & South America Regional Headquarters

San Jose, CA, U.S.A.

Asia-Pacific Regional Headquarters

Taipei, Taiwan

Canada Sales Office

Vancouver, B.C., Canada

China Sales Office

Shanghai, China

Czech Republic Sales Office

Brno, Czech Republic

Denmark Sales Office

Støvring, Denmark

Germany Sales Office

Mechernich, Germany

Italy Sales Office

Livorno, Italy

Poland Sales Office

Warsaw, Poland

Spain Sales Office

Barcelona, Spain

Ukraine Sales Office

Lviv, Ukraine

www.agneovo.com