




PN 901406

UPC 7 84090 04039 8

100W PD Dual Host KVM Dock 3x Display

Key Features:

- Compatibility for USB-C and Thunderbolt™ 3 Systems
- Power Delivery for two systems (up to 100W each)
- Supports up to 3 external displays
- 2x USB 2.0 Dedicated KBM Ports (Keyboard / Mouse)
- 2x SuperSpeed USB 3.0 Ports
- 1x USB-C 3.2 Gen 2 Port
- 2x USB-C Ports for system connections
- 2x DisplayPort
- 1x HDMI
- RJ45 Gigabit Ethernet Port
- Kensington™ Security Lock Slot
- Enterprise Features
 - Wake on LAN
 - MAC Address Pass-Through
 - PXE Boot

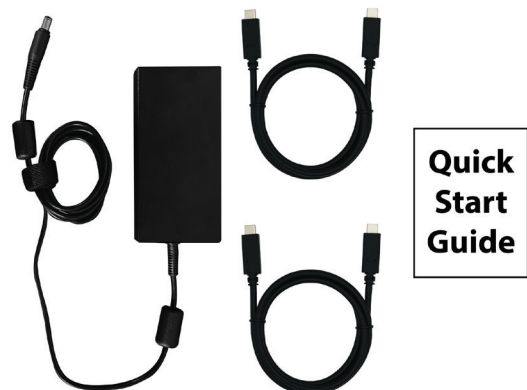


**Quick
Start
Guide**

The VisionTek VT4900 USB-C KVM Docking Station allows you to easily connect your Windows™, Mac™ or Chrome™ laptops to up to three 4K displays, accessories and peripherals through a single USB-C connection on each system. This high-quality KVM Switch is a docking station solution that enables you to take full advantage of additional 4K displays and five USB devices, including full sized keyboard and mouse, external storage and mobile devices for charging and data transfer.


- **USB-C Compatibility** – Compatible with USB-C and Thunderbolt™ 3 systems running Windows™, Mac™ OS or Chrome™ OS, making this an ideal KVM switch docking station for environments with a variety of systems. The VT4900 comes with two USB Type-C to C cables for ease of setup with host systems.
- **Connect Three External Displays** – Increase productivity by expanding your workspace with up to three additional displays for a single system, you may also select to use a single display for one system and two for the other system.
DP 1.2 supports resolutions up to 4096 x 2160 @60Hz. (DisplayLink)
HDMI supports resolutions up to 4096 x 2160 @30Hz. (DisplayPort over USB-C)
- **Power Delivery** - Charge both systems with up to 100W Power Delivery.
- **13-in-1 Dock with 2 USB 3.0 and 1 USB-C Ports** – The VT4900 was designed for maximum compatibility by including many of the most commonly needed ports in one dock.
 - 2 x USB 3.1 Type-C Gen 2 ports connects up to two systems with the included USB-C cables.
 - 2 x DP and 1x HDMI ports let you connect up to three external displays to increase your system workspace. HDMI supports resolutions up to 4096x2150 @60Hz. (DisplayPort over USB-C with DP 1.4, DP 1.2 Limited to 30Hz). Additional displays may be supported with the VT70 plugged into USB 3.0 ports of the dock (sold separately).
 - 2 x USB 3.0 ports let you connect external storage or mobile devices while supporting data transfer rates of up to 5Gbps.
 - 1 x 3.5mm Stereo Audio Line-Out port for headphones and 1 x 3.5mm Line-In port for a microphone, allowing for video conference communication and music listening via host system.
 - 1 x RJ 45 Ethernet with 10/100/1000 Mbps support keeps you wired to the internet, avoiding Wi-Fi connection issues or security concerns.

Part Number: 901406 | UPC Code: 7 84090 04039 8

Front

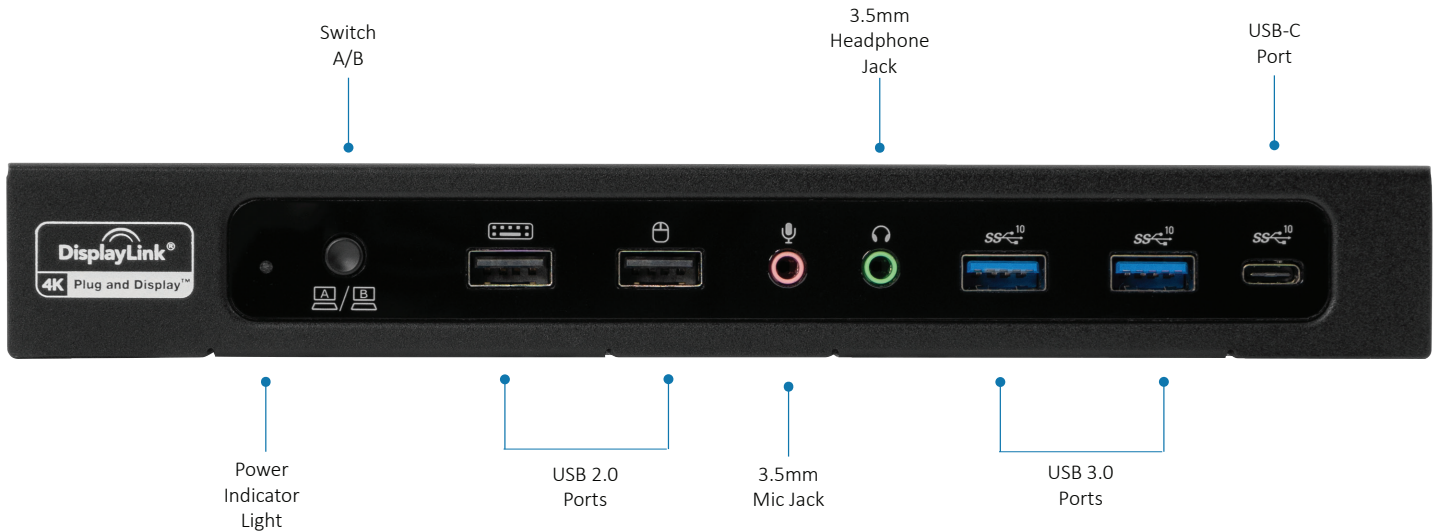

Back

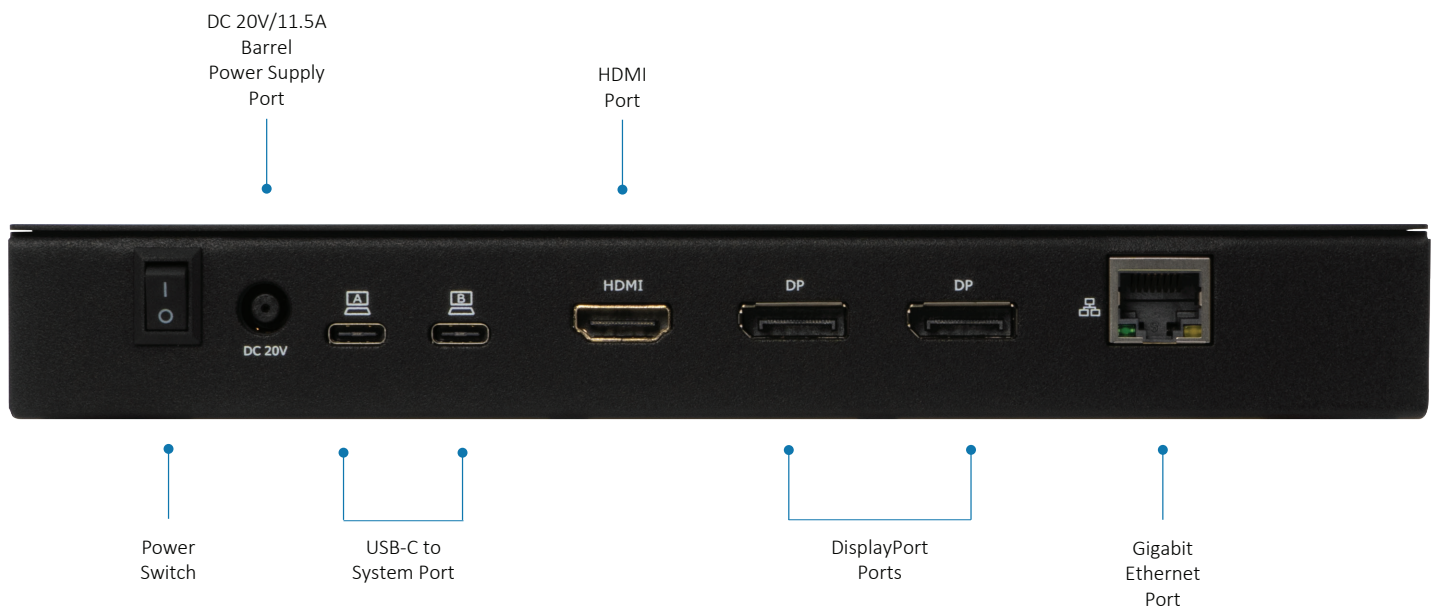

System Requirements

Operating Systems Supported	Windows™ 10, 8.1, 7 MacOS™ 10.10 and later
System Resource Requirement	System with USB 3.0/3.1 Type-C

Dock to System Connection

Dock Connector	USB 3.0 Type USB-C Gen 2 or Thunderbolt™ 3
----------------	--

Video Connections

Single Display	DisplayPort: HDMI:	Up to 4096 x 2160 @60Hz Up to 4096 x 2160 @30Hz (60Hz with DP Alt-Mode and DP 1.4 support)
Dual Display	DisplayPort: HDMI:	Up to 4096 x 2160 @60Hz Up to 4096 x 2160 @30Hz (60Hz with DP Alt-Mode and DP 1.4 support)

USB Connections

Front	2x USB 3.0 Type-A 2x USB 2.0 Type-A 1x USB 3.0 Type-C
Back	2x USB 3.0 Type-C (System specific - 1 or 2)

Network Connections

Ethernet Port	1x RJ45
Compatible Ethernet Speed	10/100/1000 Mbps

Audio Connections

Audio Connectors	1x 3.5mm Stereo Audio Line-Out - Front 1x 3.5mm Line-In - Front
Audio Channels Supported	Stereo LR

Power and Environmental

Power	230W 20V/11.5A Power Brick
Operating Temperature	0 to 40° C (32 to 104° F)
Storage Temperature	-10 to 70° C (14 to 158° F)
Relative Humidity	10% to 90% non-condensing - Operational 10% to 90% non-condensing - Storage

Technology Information

Integrated Chip Sets (IC)	DisplayLink™ DL-6950
---------------------------	----------------------

Part Number: 901406 | UPC Code: 7 84090 04039 8

Dock
Specifications

Product Dimensions

Product Dimensions	Length: 8.75" (222mm) Depth: 3.25" (83mm) Height: 1.03" (26mm)
Product Weight	0.75lbs (340g)
Included Cable Length	1 meter (3ft)
Product Color and Material	Black ABS

Packaging Dimensions

Packaging Style	Retail Box
Packaging Specifications	Length: 12.36" (314mm) Depth: 3.27" (83mm) Height: 2.52" (63mm) Weight: 1 lbs 15oz (890g)
Master Carton	10 pcs
Individual Package Contents	1 x VT4900 Dock 1 x 230W Power Brick 2 x USB-C 3.0 to USB-C 3.0 Cables 1 x Software Installation CD 1 x User Manual

Country of Origin and Warranty Information

Country of Origin	Taiwan
Certifications and Compliance	CE, FCC, REACH, RoHS, WEEE, DP 1.4 Certified, USB-C Certified
Warranty	2-Year Limited

Additional Features

Security	Kensington™ Security Lock Slot
----------	--------------------------------

Compatible Recommendations

Cables	VisionTek DP to DP 2M Cable - PN 901211 VisionTek HDMI Pivot Cable 3ft - PN 900811 VisionTek HDMI High Speed 6ft Cable - PN 901214 VisionTek VT70 USB 3.0 to DP Adapter - PN 901225
External Storage	VisionTek 1TB XT USB 3.0 Pocket SSD - PN 901241

All specifications are subject to change without notice. Products may not be available in all markets. The VisionTek name and design are registered trademarks of VisionTek Products, LLC. All other registered and unregistered trademarks are the property of their respective owners.

FOR MORE INFORMATION CONTACT: 1-866-883-5411 | sales@visiontek.com