




LCS-GS7105-E
5-Port Switch
10/100/1000 Mbit/s
Fanless
Metall Housing
Loop Detection

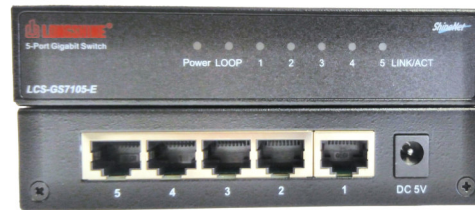

The **LCS-GS7105-E** Switch has 5 Ports à 10/100/1000Mbit/s, all eight Ports have Auto-negotiation and Auto MDI/MDI-X. The Switch is very flexible to use, at home or in offices, he connects any networking structures from 10Mbit/s, 100Mbit/s to 1000Mbit/s. His datarate from up to 1000Mbit/s and the implemented Store-and-Forward feature gives you a high data-throughput with automatic error correction for the whole network. The small dimensions and the wallmount-kit makes him fittible in every situation.

Features:

- ♦ Interface: 5 Ports with 10/100/1000Mbit/s
- ♦ Supports Full- und Half-Duplex operations on all Ports
- ♦ Supports Auto MDI-/MDI-X
- ♦ Supports back-pressure (Half Duplex) and flow control (IEEE 802.3x)
- ♦ Store-and-Forward Architecture is filtering Fragments and CRC error packets
- ♦ Supports Jumbo Frames 12K
- ♦ Small Desktop-Case
- ♦ EEE Energy Efficient Ethernet IEEE802.3az
- ♦ Loop Detection
- ♦ LEDs for Networkdiagnostic
- ♦ Emission: CE, FCC Class B, VCCI Class B

Specifications:

Standard:	IEEE 802.3; IEEE 802.3u; IEEE 802.3ab IEEE 802.3x; IEEE 802.3az; IEEE 802.1p
Jumbo Frame:	9K
MAC- Adresses:	2K
Backplane:	10 GB/s
Network speed:	10Mbps: Full/Half duplex , 100Mbps: Full/Half duplex 1000Mbps: Full duplex
Switching Forwarding Rate	7,4 Mbps
LEDs:	Power/Link/Act/Collision/Loop Detection
Emission :	FCC Class A, CE
Temperature :	0°C ~ 40°C
Humidity :	10% ~ 90% (non-condensing)
Dimensions:	121mm x 74mm x 26mm (L x W x H)
Power Supply :	External Power Supply 5V, 1A
In the box:	Switch, Manual, Power Supply, Wallmountkit
EAN	4016621124205